

PORTABLE POWER STATION

May the power be with you



HBP 500 Series

HBP500 Series Portable Power Station is fashion and convenient to carry. It can supply power for many home appliances under emergency situation and can also meet the electricity demand of various outdoor operations including automobile tour.



HIGH CAPACITY

Long battery life.
Meet the needs of indoor
and outdoor.



PURE SINE WAVE

Same as the household power.
Doesn't damage electrical
equipment.



STRONG COMPATIBILITY

Multiple outputs can
supply power for various
electrical appliances.



SAFETY


Multiple quality inspection
to ensure power safety.



HD SCREEN

The power status is
clear at a glance.

Pic of Input & Output Ports

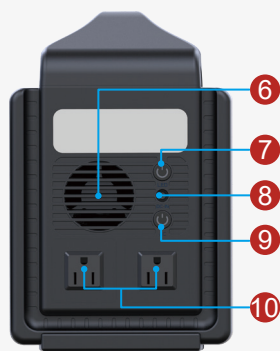

1. LED display
2. Power on/off
3. DC5521 13.6V/8A
4. Cigarette lighter interface
5. USB-C/USB-A1
6. Fan
7. LED switch
8. IN charging port
9. AC switch
10. AC output (US/EU)











PORTABLE POWER STATION

HBP 500 SERIES

MUST[®]

Specifications

Model	HBP500
Rated Capacity	560Wh
Rated Power	500W, Peak 1000W
Cell Type	LiCoMnNiO2
2×AC Output	110V/500W
1×USB-C Output	65W max
3×USB-A Output	18W max
1×Car Socket+2×DC5521 Output	13.6V/8A
Mains Charging (120W Adapter)	6 hours
Type-C Charging (65W)	10 hours
Dual Charging (185W)	4 hours
Working Temperature	0~45°C
Size	288×155×240mm
Weight	6.5kg
Color	Blue, Black (customizable)
Package & Accessories	HBP500, Adapter, User manual

PRODUCT	 Laptop (60Wh)	 Phones (3110mAh)	 Camera (1500mAh)	 Voice Box (20W)	 UAV (1500mAh)
HBP-500 (500W)	Full charge 8 times	Full charge 26 times	Full charge 52 times	Discharge 24 hours	Full charge 52 times
PRODUCT	 Fans (30W)	 Lanterns (10W)	 Refrigerator (60W)	 Rice Cooker (300W)	 Heater (280W)
HBP-500 (500W)	Discharge 16 hours	Discharge 48 hours	Discharge 8 hours	Discharge 1.6 hours	Discharge 1.8 hours

The technical specifications of this document are subject to change without any notice